


Corduroy Part M - Retro Fit

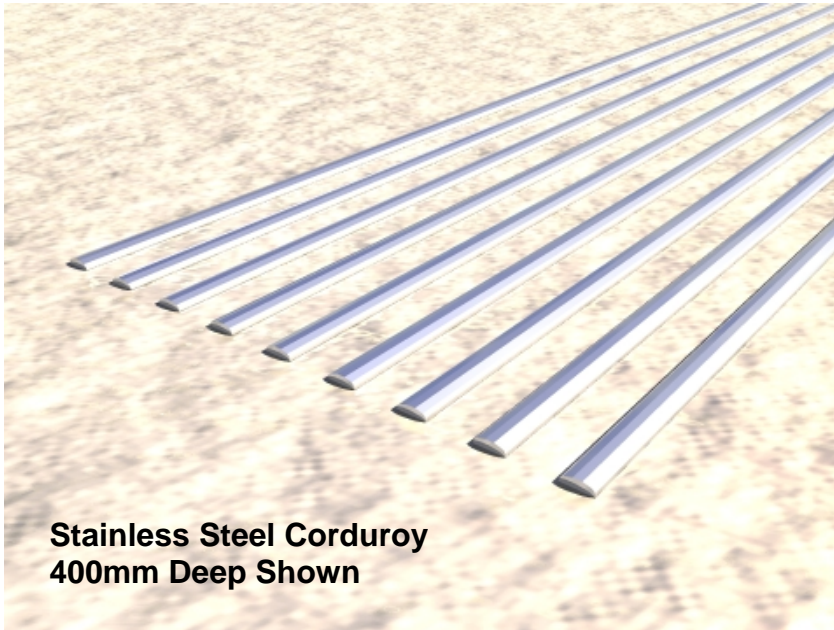

Stainless Steel "Corduroy" Paving Strips. Retro-Fit into almost any existing paving.

The paving surface is drilled and Epoxy resin used to retain the Strips via invisible studs.

The raised surface can be detected by both sighted and visually impaired pedestrians.

Hazard warning indication of:

- Level crossings
- Approach to on street Light Rapid Transport platforms
- Steps (top and bottom)
- Where a footpath joins a shared route

Solid rounded bar 20mm wide x 6.0mm (+/- 0.5) high. Stud dimensions are compliant with the Part M and DDA Regulations.

Strips are supplied in standard 400mm long sections to be butted up end to end.

Corduroy Strips should be positioned in rows 50mm (+/- 0.5) apart, centre of bar to centre of bar. Rows of Corduroy strips should be laid to a minimum depth of 400mm. Other applications may require a minimum depth of 800mm. The rows should extend beyond the hazard by at least 400mm.

A Steel Site "Drilling Template" can be supplied to suit the application.

Also available in Brass