


Plain

Static

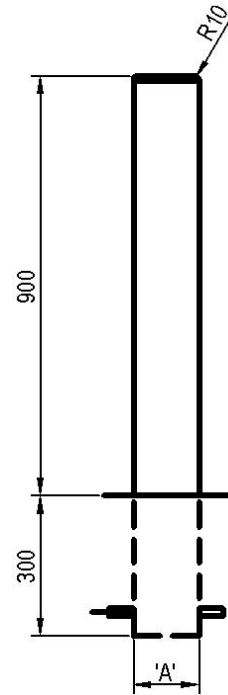


The low cost of this product makes it suitable for any basic application where simple strength and practicality are the main criteria.

Mild Steel to BS 1449. Available in various diameters from 114mm to 193mm.
Optional Hot dipped galvanised to BSEN ISO 1461 (1999)
Polyester Powder Coated 40-60 micron.

Mounting options: Static, Removable or Telescopic (Swing Lock)

Model	Name	Mounting	Dia 'A'	Galvanised	PPC	Dome Top	Data Sheet
USP041	PLAIN	Static	114mm	Option	Option	Option	USP041.PDF
USP042	PLAIN	Static	139mm	Option	Option	Option	USP042.PDF
USP043	PLAIN	Static	168mm	Option	Option	Option	USP043.PDF
USP044	PLAIN	Static	193mm	Option	Option	Option	USP044.PDF
USP045	PLAIN	Removable	114mm	Option	Option	Option	USP045.PDF
USP046	PLAIN	Removable	139mm	Option	Option	Option	USP046.PDF
USP047	PLAIN	Telescopic	90mm	Option	Option	N/A	USP047.PDF
USP048	PLAIN	Telescopic	114mm	Option	Option	N/A	USP048.PDF

Removable

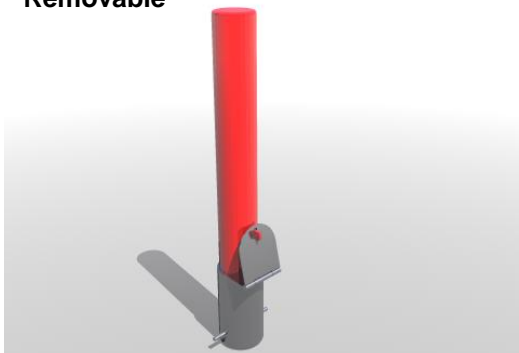

Telescopic
(Swing Lock)

